

# E 6040

SP150



SOIL DISPLACEMENT KIT



# E 6040

SP150

SOIL DISPLACEMENT KIT

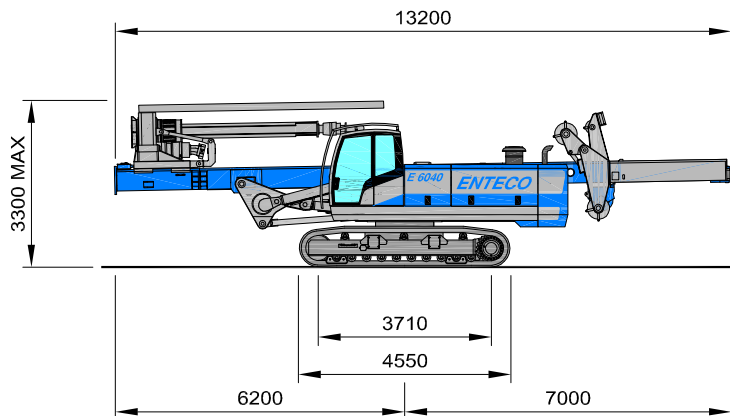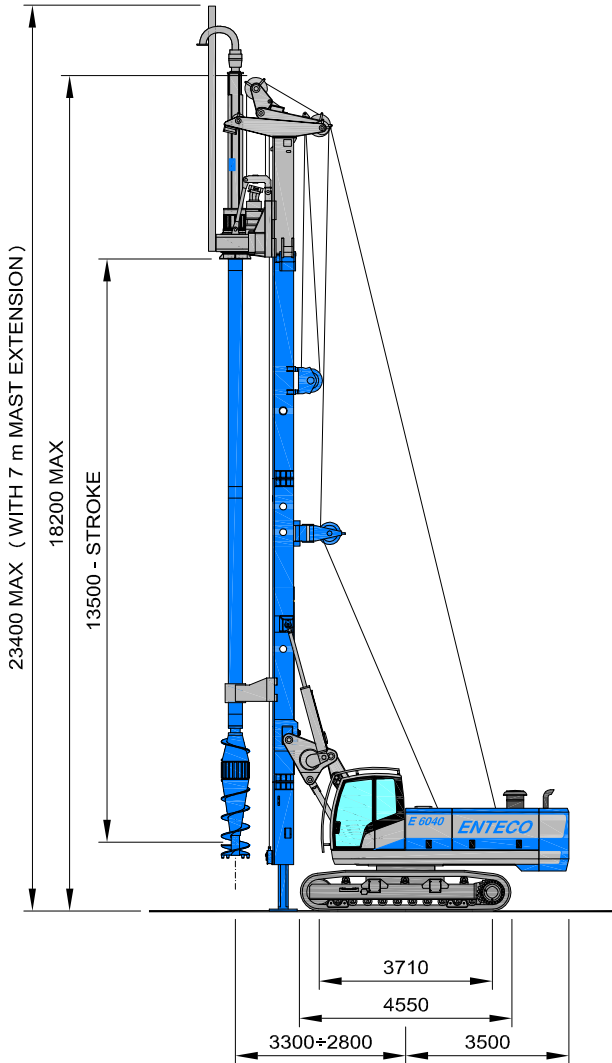

## E 6040 - SP150 SOIL DISPLACEMENT KIT

OPERATING WEIGHT	mm	up to 42
Drilling diameter	mm	320+620
Max drilling depth	m	19

### MAST

Front/Rear inclination		+4°/-15°
Side inclination		±4°

### CROWD SYSTEM

WINCH

Rotary stroke	mm	13500
Crowd force	kN	150
Extraction force	kN	450

### ROTARY

Model		ENTECO RH41
Max torque	kNm	150
Max drilling speed	rpm	31+64
Auger extension	m	3 or 7

## E 6040 - BASE MACHINE

### CRAWLERS

Overall width	mm	2500+3700
Track pads	mm	600
Crawler drive speed	km/h	2.1

### DIESEL ENGINE

Model	CATERPILLAR	C7 ACERT
Rated power	HP/kW	250/187
Fuel tank capacity	litres	350

### MAIN WINCH

Max line-pull 1st layer	kN	150
Free-fall device		option

### AUXILIARY WINCH

Max line-pull 1st layer	kN	50
Free-fall device		option



Via dell'Artigianato, 33 - Z.I. - 30020 Fossalta di Piave - VENEZIA - ITALIA  
 Tel +39 0421 67.99.77 - Fax +39 0421 67.99.93 - e-mail: info@entecodrill.com - www.entecodrill.com