


E 6060

R250



B O R E D P I L E S K I T

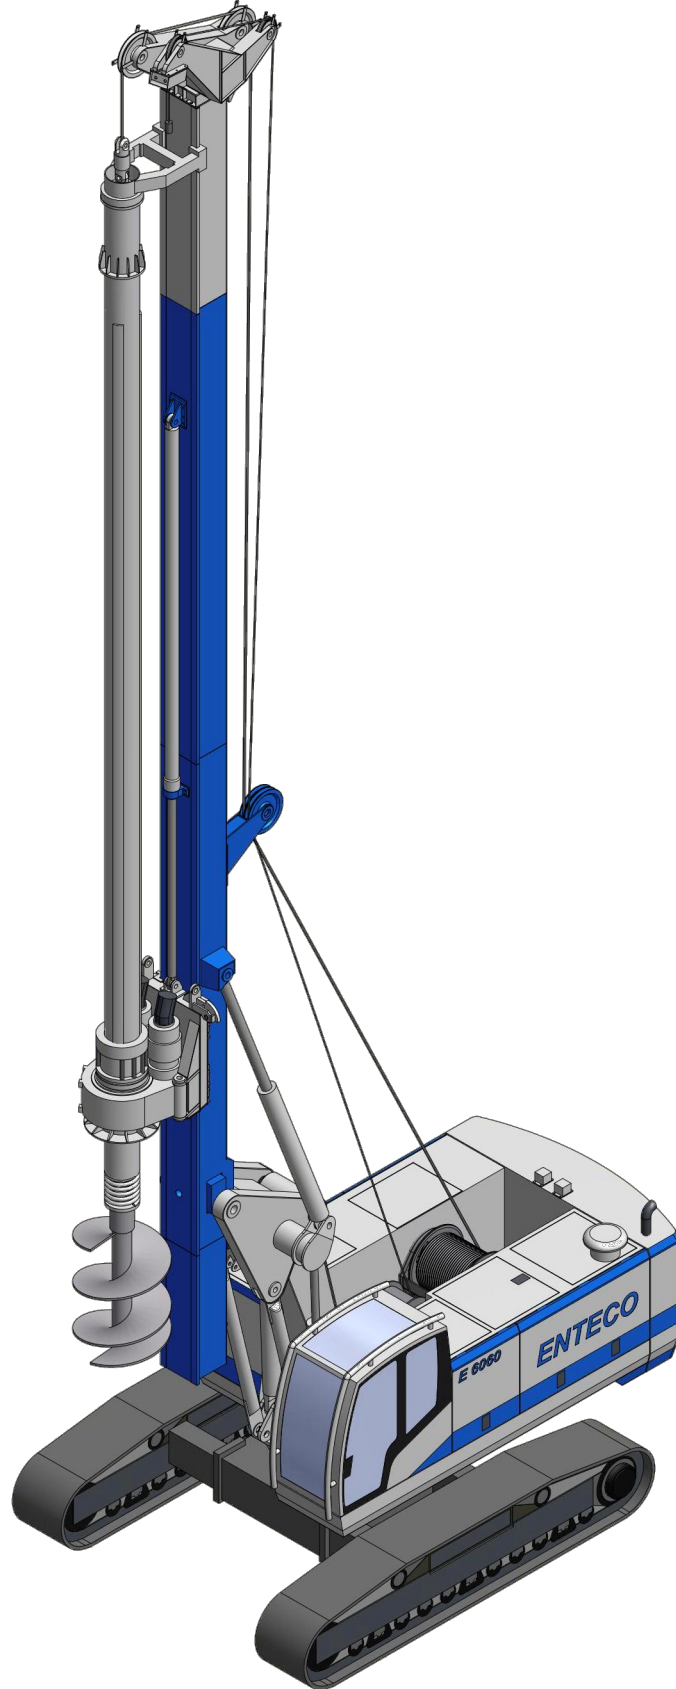

E 6060

R250

BORED PILES KIT

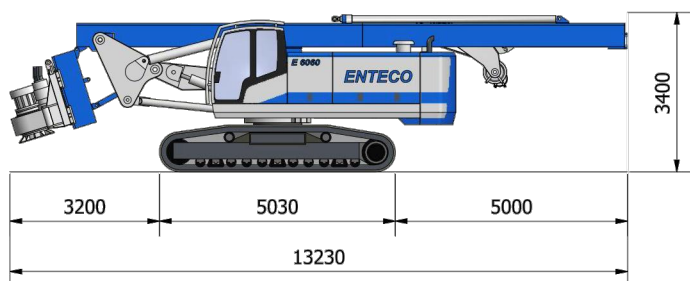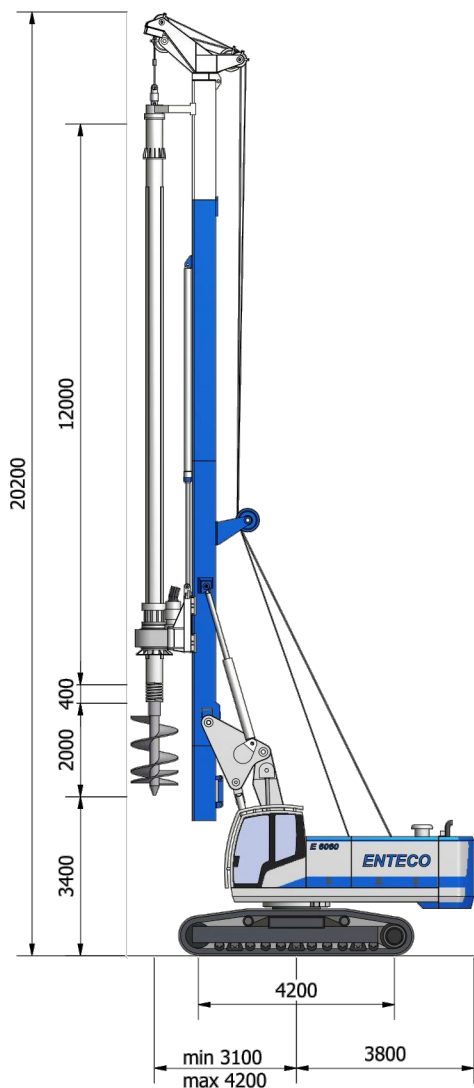

E 6060 - R250 BORED PILES KIT

OPERATING WEIGHT	ton	up to 62
-------------------------	-----	----------

Drilling diameter Auger in front of the mast	mm	1500
---	----	------

Drilling diameter with carriage spacer Auger in front of the mast	mm	1800
--	----	------

Drilling diameter Auger beneath the mast	mm	2000
---	----	------

Max drilling depth	m	54
--------------------	---	----

MAST

Front/Rear inclination	+4°/-15°
------------------------	----------

Side inclination	±4°
------------------	-----

CROWD SYSTEM

CYLINDER

Rotary stroke	mm	4500
---------------	----	------

Crowd force	kN	150
-------------	----	-----

Extraction force	kN	200
------------------	----	-----

ROTARY

Model	ENTEKO RH41/2
-------	---------------

Max torque	kNm	250
------------	-----	-----

Max drilling speed	rpm	33+60
--------------------	-----	-------

Spin-off speed	rpm	160
----------------	-----	-----

INTERLOCKING KELLY-BAR

Type - elements/length	3x9 m	3x12 m	4x9 m	4x12 m
------------------------	-------	--------	-------	--------

Max depth	m	24	33	32	44
-----------	---	----	----	----	----

Weight	kg	4000	5200	4600	6000
--------	----	------	------	------	------

FRICITION KELLY-BAR

Type - elements/length	4x12 m	5x12 m
------------------------	--------	--------

Max depth	m	44	54
-----------	---	----	----

Weight	kg	4900	5600
--------	----	------	------

E 6060 - BASE MACHINE

CRAWLERS

Overall width	mm	3000+4200
---------------	----	-----------

Track pads	mm	700
------------	----	-----

Tramming speed	km/h	2.1
----------------	------	-----

DIESEL ENGINE

CATERPILLAR

CUMMINS

Model	C7 ACERT	QSC 8.3
-------	----------	---------

Rated power	HP/kW	250/186	335/250
-------------	-------	---------	---------

Fuel tank capacity	litres	500
--------------------	--------	-----

MAIN WINCH

Max line-pull 1st layer	kN	185
-------------------------	----	-----

Free-fall device	option
------------------	--------

AUXILIARY WINCH

Max line-pull 1st layer	kN	70
-------------------------	----	----

Free-fall device	option
------------------	--------



Via dell'Artigianato, 33 - Z.I. - 30020 Fossalta di Piave - VENEZIA - ITALIA

Tel +39 0421 67.99.77 - Fax +39 0421 67.99.93 - e-mail: info@entecodrill.com - www.entecodrill.com