


E 6050

CFA240



CONTINUOUS FLIGHT AUGER KIT

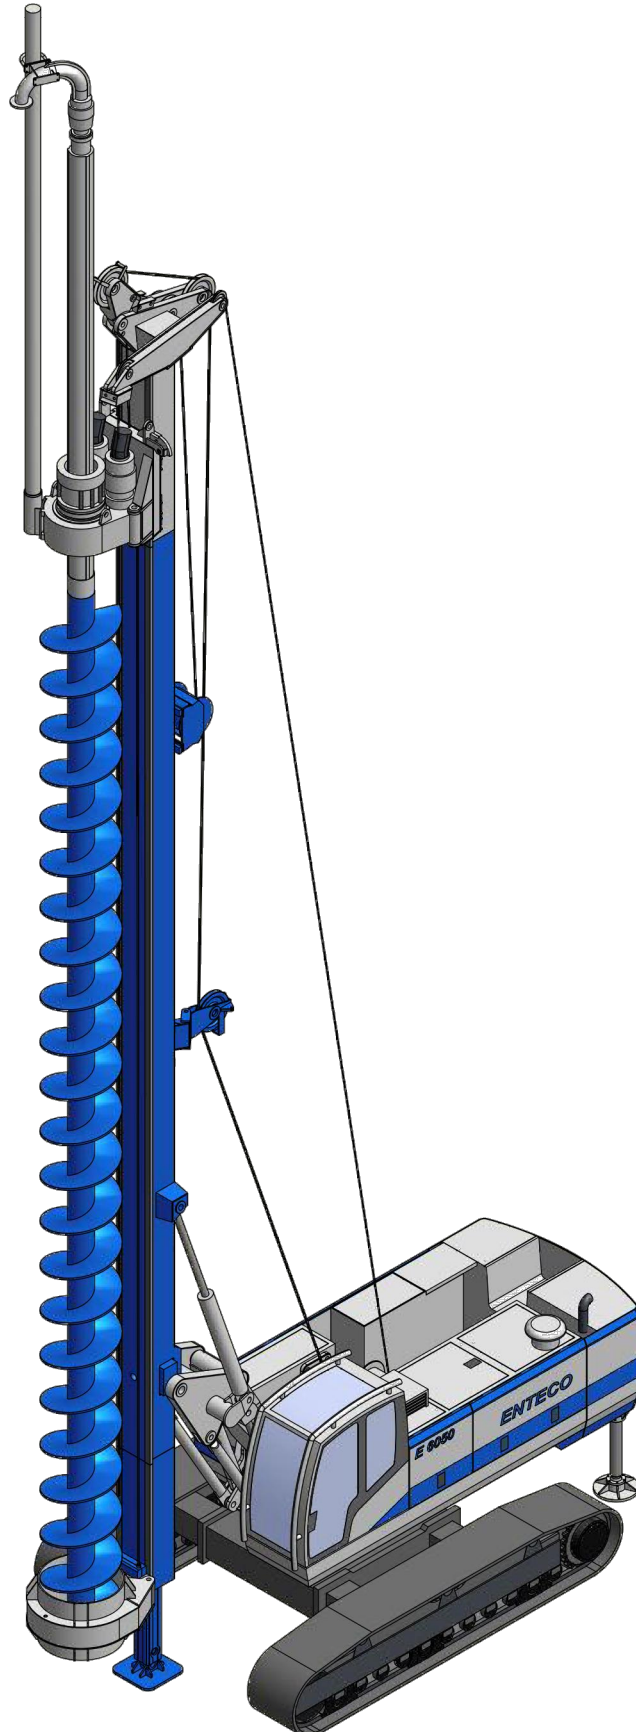

E 6050

CFA240

CONTINUOUS FLIGHT AUGER KIT

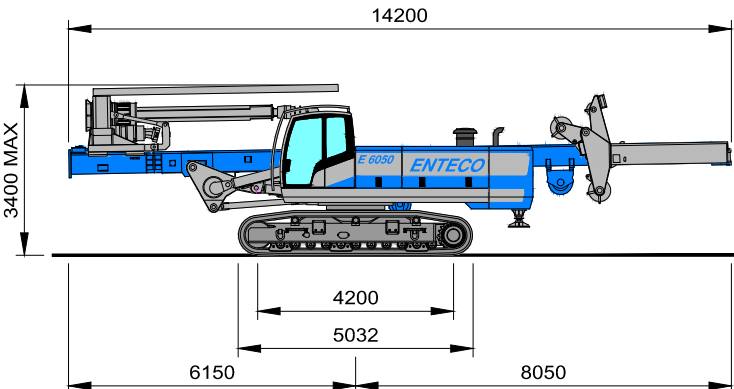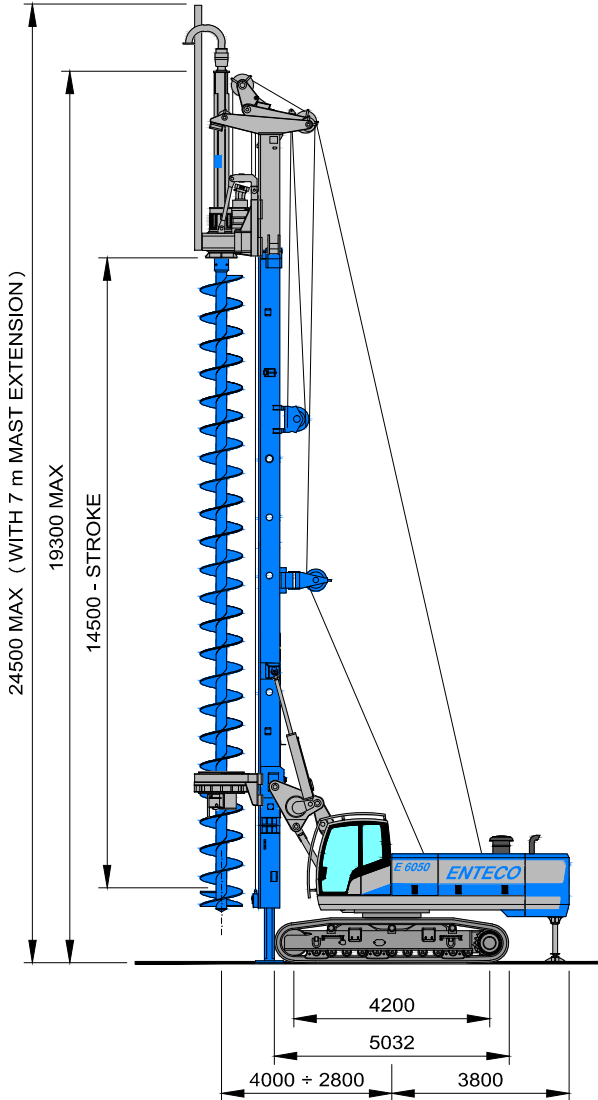

E 6050 - CFA240 CONTINUOUS FLIGHT AUGER KIT

OPERATING WEIGHT	ton	up to 56
Drilling diameter	mm	500+1200
Max drilling diameter with carriage spacer	mm	1200
Max drilling diameter without carriage spacer	mm	900
Max drilling depth	m	20

MAST

Front/Rear inclination	+4°/-15°
Side inclination	±4°

CROWD SYSTEM

Rotary stroke	mm	14500
Crowd force	kN	200
Extraction force	kN	530

ROTARY

Model	ENTECO RH41/2	
Max torque	kNm	245
Max drilling speed	rpm	39-60
Auger extension	m	3 or 7

ROTATING AUGER CLEANER

Max diameter	mm	900 or 1200
Reduction	mm	down to 400

E 6050 - BASE MACHINE

CRAWLERS

		STANDARD	OPTION
Overall width	mm	3000+4200	2550+3950
Track pads	mm	700	650
Crawler drive speed	km/h	2.1	2.1

DIESEL ENGINE

Model	CATERPILLAR	C9 ACERT
Rated power	HP/kW	350/261
Fuel tank capacity	litres	400

MAIN WINCH

Max line-pull 1st layer	kN	165
Free-fall device		option

AUXILIARY WINCH

		STANDARD	OPTION
Max line-pull 1st layer	kN	50	70
Free-fall device		option	option



Via dell'Artigianato, 33 - Z.I. - 30020 Fossalta di Piave - VENEZIA - ITALIA
Tel +39 0421 67.99.77 - Fax +39 0421 67.99.93 - e-mail: info@entecodrill.com - www.entecodrill.com