
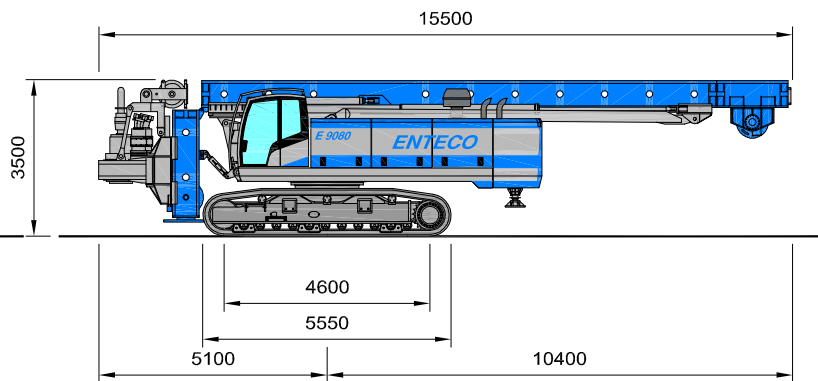


# E 9080

## DR300

DOUBLE ROTARY KIT

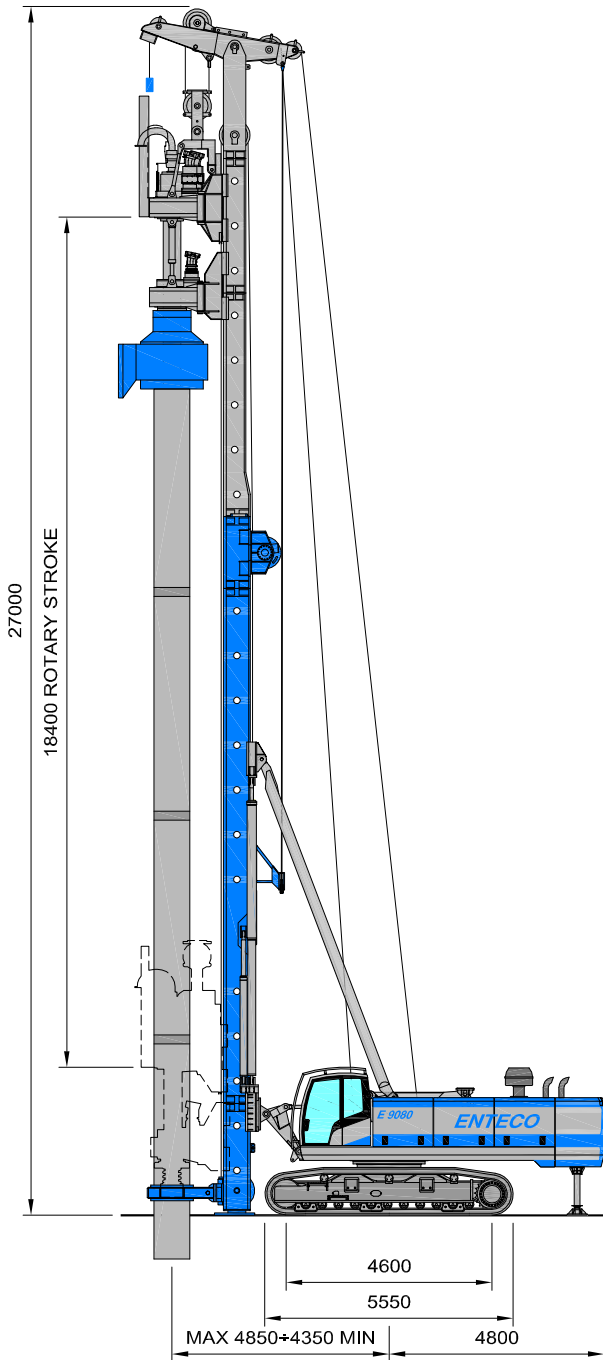

### E 9080 - DR300 DOUBLE ROTARY KIT

<b>OPERATING WEIGHT</b>	ton	up to 94
Drilling diameter	mm	500÷1000
Max cased depth	m	19
<b>MAST</b>		
Standard mast length	mm	25350
Mast vertical travel	mm	2000
<b>CROWD SYSTEM</b>		
		4 part line      2 part line
Rotary stroke	mm	18400      18400
Crowd force	kN	330      330
Extraction force	kN	1200      870
<b>ROTARY FOR AUGER</b>		
Model		ENTECO RH51/2
Max torque	kNm	320
Max drilling speed	rpm	33
<b>ROTARY FOR CASING</b>		
Model		ENTECO RH61/2
Max torque	kNm	360
Max drilling speed	rpm	21

### E 9080 - BASE MACHINE

<b>CRAWLERS</b>		
Overall width	mm	3000÷4500
Track pads	mm	900
Crawler drive speed	km/h	1.8
<b>DIESEL ENGINE</b>		
Model	CATERPILLAR	C15 ACERT
Max power	HP/kW	540/403
Fuel tank capacity	litres	750
<b>MAIN WINCH</b>		
Max line-pull 1st layer	kN	270
<b>AUXILIARY WINCH</b>		
Max line-pull 1st layer	kN	150
<b>COUNTERWEIGHT</b>		
Total weight	kg	12000

